
EREBA ANTENNAS

KGPS-2G-804

Dual mode GPS Magnetic mobile antenna for the 136 - 174 MHz Band, 1575 Mhz in GPS

MOBILE ANTENNAS

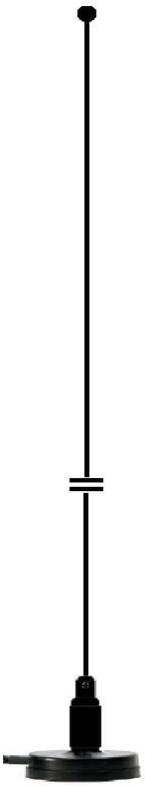

High-performance radiator (conical 17-7 PH Black Chrome whip), which can be easily tuned by use of cutting chart. The antenna has vertical polarization with 5/8 wave configuration for long range per-fromance. The inbedded GPS antenna is active and offers 27 dB gain. The antenna is supplied with 5.0 meter-long cable of the RG58/U type for RF and rg 174 for GPS, both cables can terminate in any type of connector.



BLACK SPRING S4




IN2-R

SPECIFICATIONS

ELECTRICAL	
Frequency Range	136-174 MHz
Input power	100 W
SWR	< 1.5 : 1
Impedance	50 Ω
Polarization	Vertical
Gain	3 dB with ground plane
GPS Gain	27 dB active
MECHANICAL	
Length	130 cm max.
Weight	0.4 Kg

When ordering, please, specify : *Exact Tx Rx frequencies. Antenna base mount MDT. Connector type (BNC, PL.TNC,N,F-ME,SMA). Connector GPS type (SMA,FME, SMB...). With or W/O Spring (S4).*

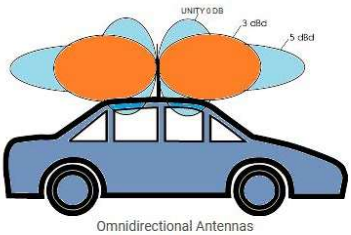

Omnidirectional Antennas
5/8 lambda, 3dB Gain